


AR-001 Core and retained frame: structural coordination review

SIMULATED COORDINATION REVIEW CASE STUDY | NOT FOR CONSTRUCTION | 2026-09-13

Architectural geometry checked for diagnostics. Full architecture, code actions, reinforcement and foundations remain open.

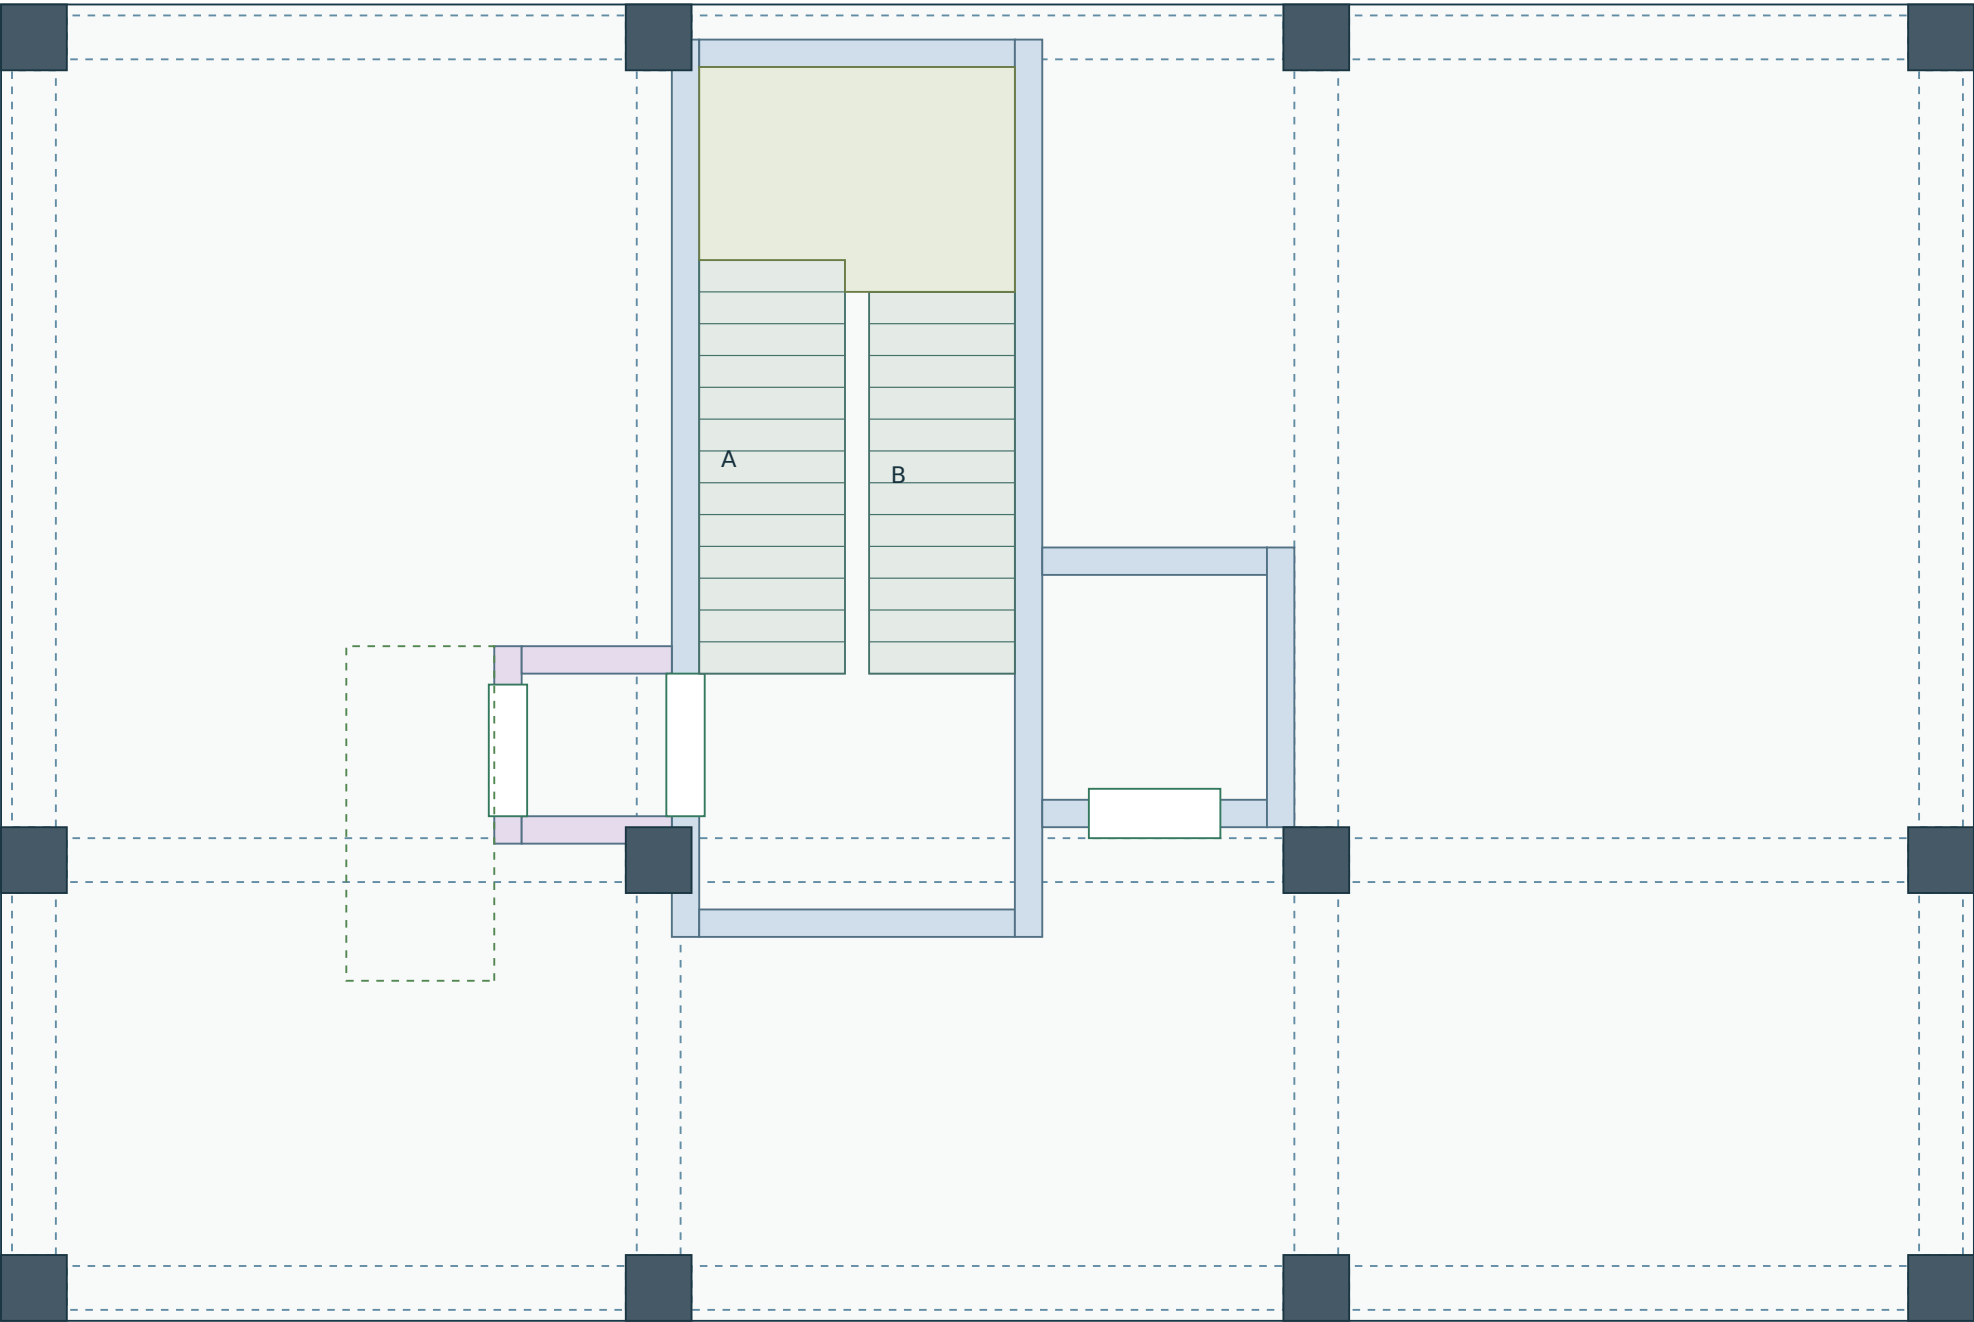

2F REFERENCE PLAN / 1:69

36 source columns / 51 source beams retained.

Orthogonal beams and 7.50 m rear bay retained.

Shared stair / lift wall retained.

ARCHITECTURAL GEOMETRY

Flight / well / flight: 1.33 / 0.22 / 1.33 m.

Finished flight: 1.238 m; 38 mm nominal margin.

Uniform rises: 133.333 mm; treads: 290 mm.

North edge +11.68; south edge +3.50 m.

Lightweight vestibules: load only, no RC stiffness.

Caps +13.85 / +12.25 m; pit RC bottom -1.80 m.

DIAGNOSTIC GEOMETRY ADOPTED

B2 clears the portal by 0.10 m in plan.

Actual finished throat: 1.28 m > target 1.20 m.

See AR-002 and SR-001/002 interface review.

Elastic joint action checked; RC design remains open.

No RC reinforcement or foundation approval.

Not a coordinated construction package.

Blue dashed: retained beams above. Columns drawn last: opening graphics cannot erase physical columns.


This geometry matches the structural input. Architectural and construction acceptance are not complete.

AR-002 B2 wall joint and entry detailing screens

SIMULATED COORDINATION REVIEW CASE STUDY | NOT FOR CONSTRUCTION | 2026-09-13

The portal clears B2. Wall-column elastic force transfer is modelled; joint reinforcement and full egress remain open.

1F PLAN DETAIL / 1:23.3

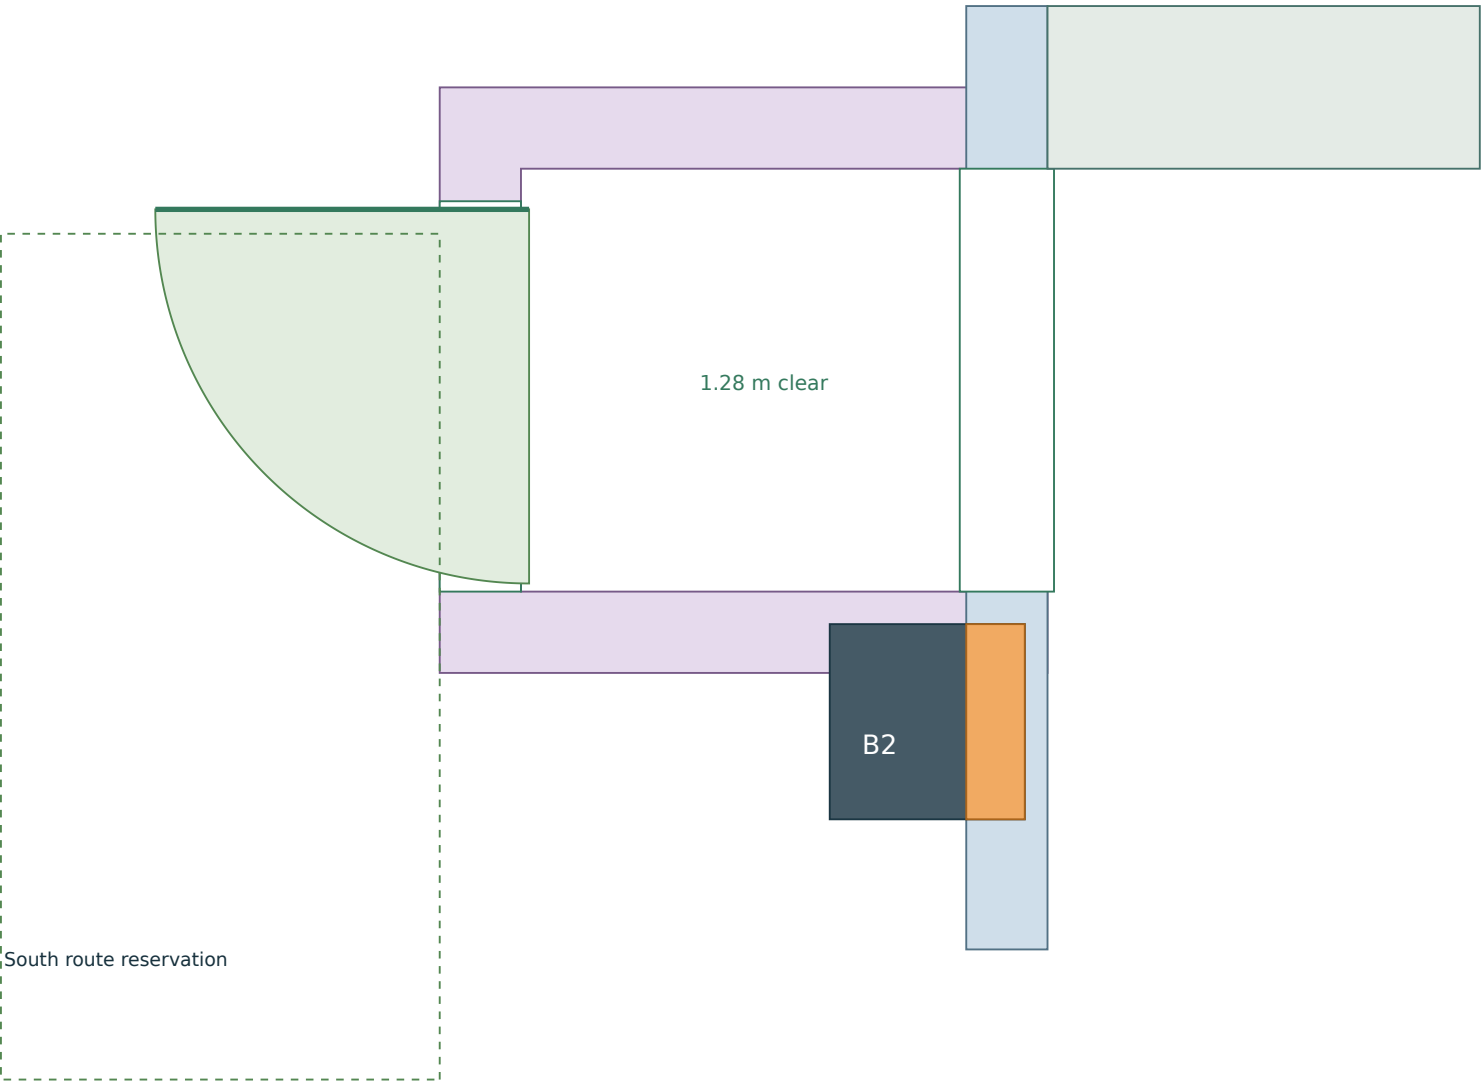

SOURCE-BASED THROAT CHECK

Portal y = 4.60 to 5.90 m.

B2 column reaches y = 4.50 m.

Unobstructed raw interval = 4.60 to 5.90 m.

After two 10 mm finishes: 1.28 m.

Project passage target: 1.20 m. Nominal pass.

OTHER NOMINAL DETAIL SCREENS

Ground top hinge opens west; full leaf is north of the reserved south route. Full egress is open.

RF jamb: 0.40 m geometric wall length.

RF door-to-turn disc gap: 43 mm.

Guard: 1.10 m; vertical infill openings <=90 mm.

Central guard / rails fit in the 0.22 m well.

Rated assemblies and all anchorage are unverified.

REMAINING STRUCTURAL DESIGN

Current code actions, combinations and system checks;

beam/column/wall/slab/stair and joint reinforcement;

anchorage, foundations and construction details;

priced quantities and construction feasibility.

Elastic joint verification does not close these gates.

The 1.20 m target is a recorded project screen; this is not a complete statutory egress review.

Ground door and guard lines are geometric reservations; certified products and reinforcement are not designed.

Main-frame solid geometry and GUIDs remain unchanged. Solver equilibrium does not clear this architectural hold.